


Industry: HVAC

UV-FCU-CL-C

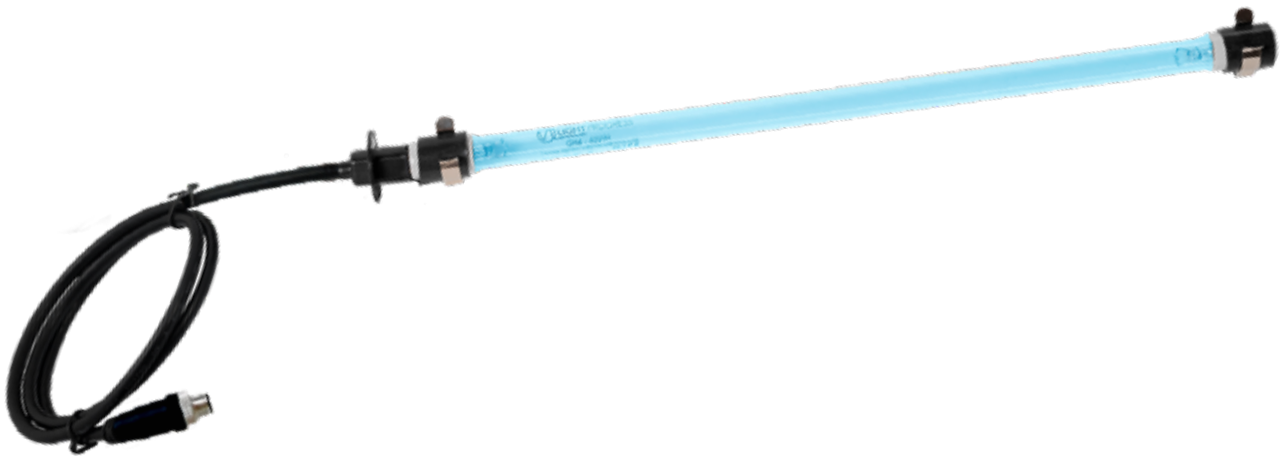

Seamless UV protection

For a carefree set up of a UV system, the easiest way is to use a 360° disinfection device, with glass fall protection, separated power supply and an adjustable mounting kit. That's UV FCU-CL.

The most convenient method for applying UV-C light inside the AHU is by using this mounting kit and the clips provided with the system. This allows you to easily install the lamp onto the mounting kit and then connect it to the ballast via the quadri-pin plug.

Another perfect spot to apply UV-FCU-CL is the space between fan and heat/cooling battery in FAN COIL UNITS. The installation is easy, you can also apply it on fan already installed and working (retrofit on existing systems).

Key Product features

- **Simple, basic, low-cost** system for AHUs, applicable also inside compact FAN COIL units.
- **Increased Disinfection Performance**, with High-Output UV-C lamps (253,7 nm).
- **360° irradiation, easy clips to install the lamps included.**
- **Protected**, with UVLON™ always included to avoid glass falling and protect against temperature fluctuations.
- **Connect to the power supply**, 3 different ballast choices to adapt to your installation and monitoring needs.
- **Choose your installation layout**, mounting kits available, to adapt to all sizes and different kind of surface/coil treatment.



Trouble-free Integration & Installation

- We provide the optimal point of integration for every product without requiring changes to your system.
- Mounting and powering the device can be done without complex requirements.
- Ongoing maintenance only takes a few minutes to replace lamps when necessary.

Software Engineered Disinfection

From our in-depth know-how on the subject and with our proprietary dosage calculation software we can simulate device performance and validate effectiveness in every application.

Technical Table

	UV-FCU-CL 16-P-C	UV-FCU-CL 25-P-C	UV-FCU-CL 40H-P-C	UV-FCU-CL 60H-P-C	UV-FCU-CL 90H-P-C	UV-FCU-CL 120H-P-C	UV-FCU-CL 150H-P-C
Replacement Lamp	GH3-16W -P-FC	GH5-25W -P-FC	GH4-40WH -P-FC	GH6-60WH -P-FC	GH9-90WH -P-FC	GH11-120 WH-P-FC	GH15-155 WH-P-FC
Power Consumption	16W	25W	40W	60W	90W	120W	155W
Lamp Size (lenght inside the duct)	mm 318 (in 12.52)	mm 546 (in 21.49)	mm 452 (in 17.79)	mm 600 (in 23.62)	mm 910 (in 35.82)	mm 1191 (in 46.89)	mm 1554 (in 61)
Interaxis Between Clips	mm 293 (in 11.53)	mm 521 (in 20.51)	mm 426 (in 16.77)	mm 574 (in 22.59)	mm 884 (in 34.80)	mm 1165 (in 45.86)	mm 1528 (in 60.15)
Weight	kg 0,20 (lb 0.44)	kg 0,30 (lb 0.66)	kg 0,70 (lb 1.54)	kg 0,30 (lb 0.66)	kg 0,70 (lb 1.54)	kg 0,80 (lb 1.76)	kg 0,90 (lb 1.98)

For All Models

Lamp Life (hours)	≤ 18.000
Protection Rating	IP 44
Op. Temperature	MIN. -15°C ÷ MAX. +40°C (MIN. 5.0°F ÷ MAX. +104.0°F)
Op. Relative Humidity	From 20 to max. 90%
VAC Frequency	230V or 110-277V 50/60 Hz
Power Supply	2 Options available, including Control Board for the management of multiple lamps, with power supply, access security, hour counter, UV lamp fault control and LED synoptic
Electrical Connection	Lamp-side cable (4x1 mm²), lenght 1m., with male connector M12. EXTENSION CABLE "CCABLE" AVAILABLE

Power supply options and control boards

Feature	Description	Supply box "BA"	Control board <<Master-STY>>
Power Output	One Ballast for each UVC device	YES	YES
Faulty Lamp Alarm	Alarm LED Indicator	-	YES
	Dry contact output (to be externally powered - up to 24 V, 500 mA -, which can be used to activate a relay or any other diagnostic related device, or external BMS)	YES	YES
Exhaust Lamp Alarm	Alarm LED Indicator Dry Contact Output (see above)	-	YES
Lamp Life Hour Counter	Digital Display	-	YES
Power Switch	Low voltage input contact from BMS or Safety System	-	YES
Synoptic View	Synoptic LED Schema	-	YES
Multi Device	Management of more than one devie	-	YES
Power Supply Cable	Cable to main power supply	length 2.5m (5x1 mm²)	-
Protection	IP rating	IP55	Up to 4 devices: IP 66/67 Up to 8/12 devices: IP 45



S P E C T R A[®]

PROFESSIONAL UV SOLUTIONS

Str. Zizinului, Nr. 110, 500407, Braşov, România
www.spectra.ro / contact@spectra.ro / (+40) 0770-187-379
SPECTRA is a trademark of AKRO