
LIGHT PROGRESS UV-TEAM-CL

YOUR BEST DISINFECTION PLAYER

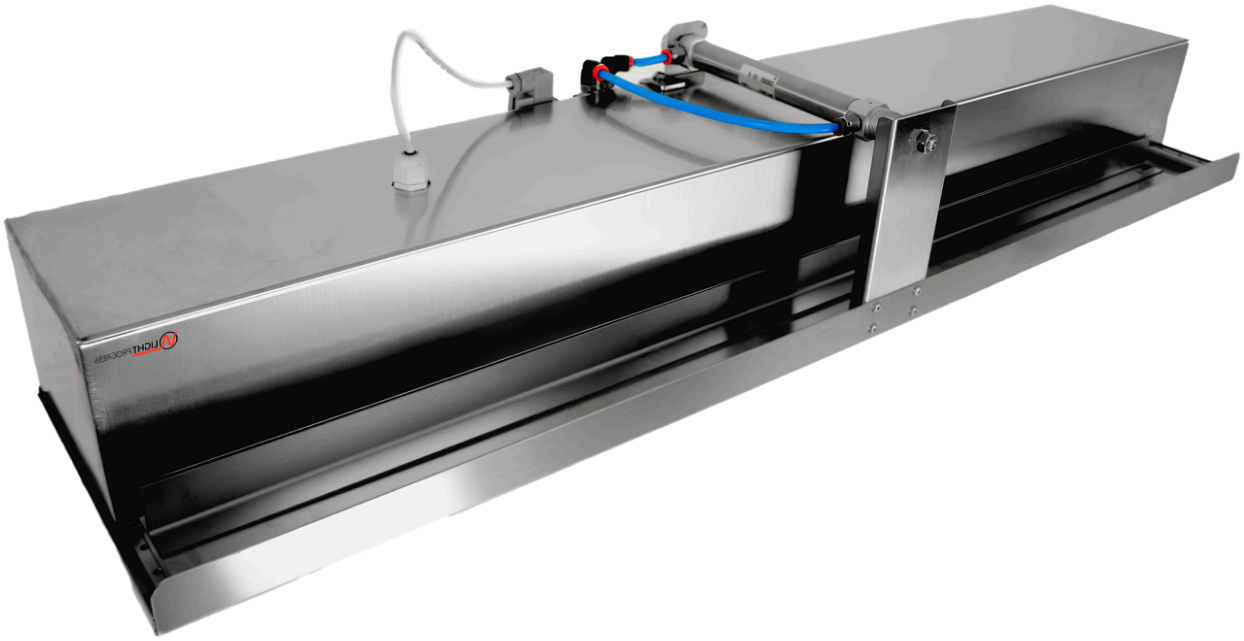


UV-TEAM is a multi-Lamp UV-C solution. Versitile and effective addition to any transport and packaging lines including flow packs, thermoforming machines, sieves, cooling tunnels, automatic scales, and more.

- Improve product safety
- Extend shelf life
- Reduce the use of chemicals
- Meet disinfection standards
- Enhance product quality


UV-TEAM is widely used in food handling & processing, pharmaceutical R&D and production, and microbiological laboratories.

KEY PRODUCT FEATURES

- Fits Any System, a scalable form factor for providing any target level of disinfection.
- Maximum Disinfection Performance, with high-output UV-C lamps and mirror bright aluminum reflectors.
- Built to Last, made with robust AISI 304 stainless steel, carefully assembled and individually tested.
- Thoughtfully Designed, IP55 environmental protection. UVLON™ lamp protection available to protect broken glass and temperature fluctuations. Cooling fan to steady power output and extend ballast life.
- Safety Automation, shutter protection avoids exposure of personel to the lamps and protects the device from maintenance and cleaning of production lines.
- System Integration, signals, alarms, and optional control board available to intigrate with complex systems.

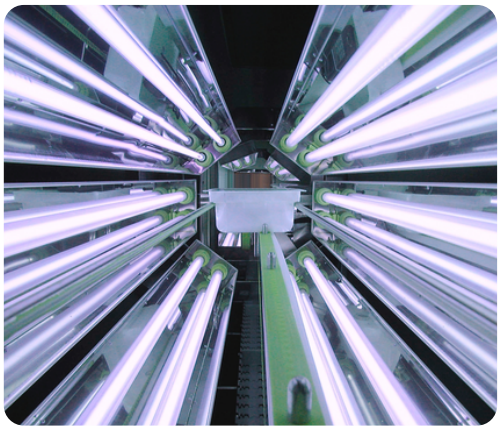



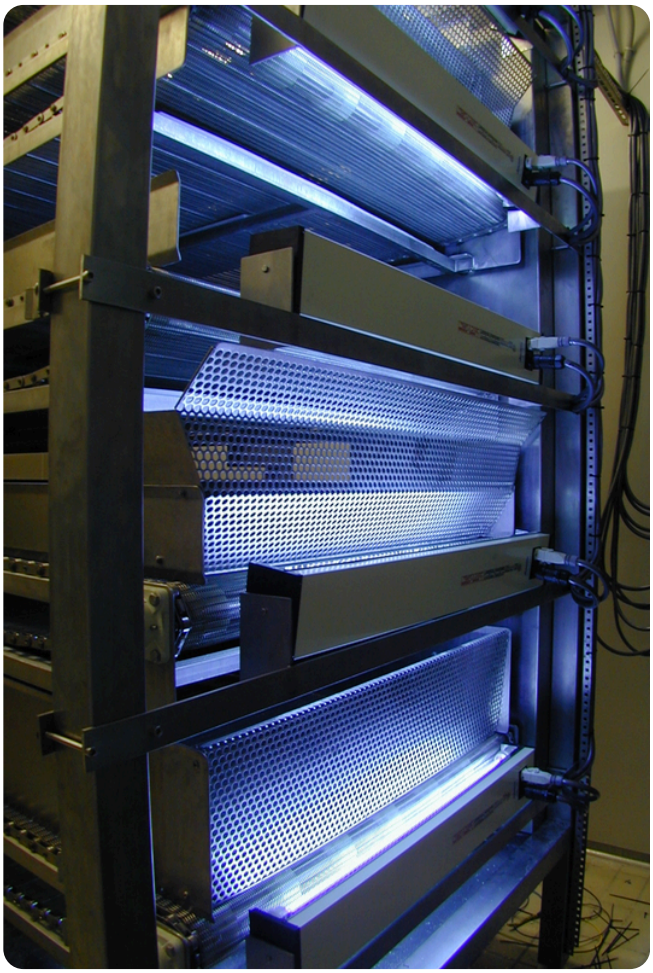

MODEL WITHOUT COOLING FAN	UV-TEAM-CL 2/40HL-S-NY	UV-TEAM-CL 4/40HL-S-NY	UV-TEAM-CL 6/40HL-S-NY	UV-TEAM-CL 8/40HL-S-NY
REPLACEMENT LAMP	N°2 CHS-40WHF	N°4 CHS-40WHF	N°4 CHS-40WHF	N°8 CHS-40WH
POWER CONSUMPTION	80W	160W	240W	320W
DIMENSIONS (WxHxD) mm	518 x 107 x 154	518 x 107 x 250	518 x 107 x 378	518 x 107 x 472
COD. MODEL WITH SHUTTER	UV-TEAM-CL2/40HL-S-NY-SD/SE	UV-TEAM-CL 4/40HL-S-NY-SD/SE	-	-
DIMENSIONS MODEL WITH SHUTTER SD/SE (WxHx D closed / D open) mm	528 x 164 x 251 / 375	528 x 164 x 362 / 559	-	-
MODEL WITH COOLING FAN	**UV-TEAM-CL 2/90HL-S-NY**	**UV-TEAM-CL 4/90HL-S-NY**	**UV-TEAM-CL 6/90HL-S-NY**	**UV-TEAM-CL 8/90HL-S-NY**
REPLACEMENT LAMP	N°2 CHS-90WHF	N°4 CHS-90WHF	N°6 CHS-90WHF	N°8 CHS-90WHF
POWER CONSUMPTION	180W	360W	550W	720W
STANDARD MODEL DIMENSIONS (WxHxD) mm	1003 x 150 x 167	1003 x 150 x 250	1003 x 150 x 378	1003 x 150 x 472
COD. MODEL WITH SHUTTER	UV-TEAM-CL 2/90HL-S-NY-SD/SE	UV-TEAM-CL 4/90HL-S-NY-SD/SE	-	-
DIMENSIONS MODEL WITH SHUTTER SD/SE (WxHx D closed / D open) mm	1013 x 164 x 251/378	1013 x 164 x 362/587	-	-
LAMP LIFE (hours)*	≤ 9.000			
PROTECTION RATING	IP67			
OP. TEMPERATURE**	MIN. -15°C ÷ MAX. +40°C | (MIN. 5.0°F ÷ MAX. +104.0°F)			
OP. RELATIVE HUMIDITY**	From 20 to max. 90%			
V AC | FREQUENCY	230V or 110-277V | 50/60 Hz			
POWER SUPPLY	On-board power supply always included. Optional Control Board available			
ELECTRICAL CONNECTION	Power supply cable (3x1mm²) length 5 m with quick-connect (IP67) plug/plug system (CLIPPER)			

* Useful life can be substantially reduced by several environmental or technical factors

** Outside of these ranges, performance may not be optimal

SPECTRA®
PROFESSIONAL UV SOLUTIONS

str. Zizinului nr. 110, Brașov, 500407, România

www.spectra.ro

+40 770 717 189

contact@akro.ro

SPECTRA is a trademark of AKRO